




1-800-248-0280  
831 Morley Drive  
Saginaw, MI 48601

DETAIL E6130

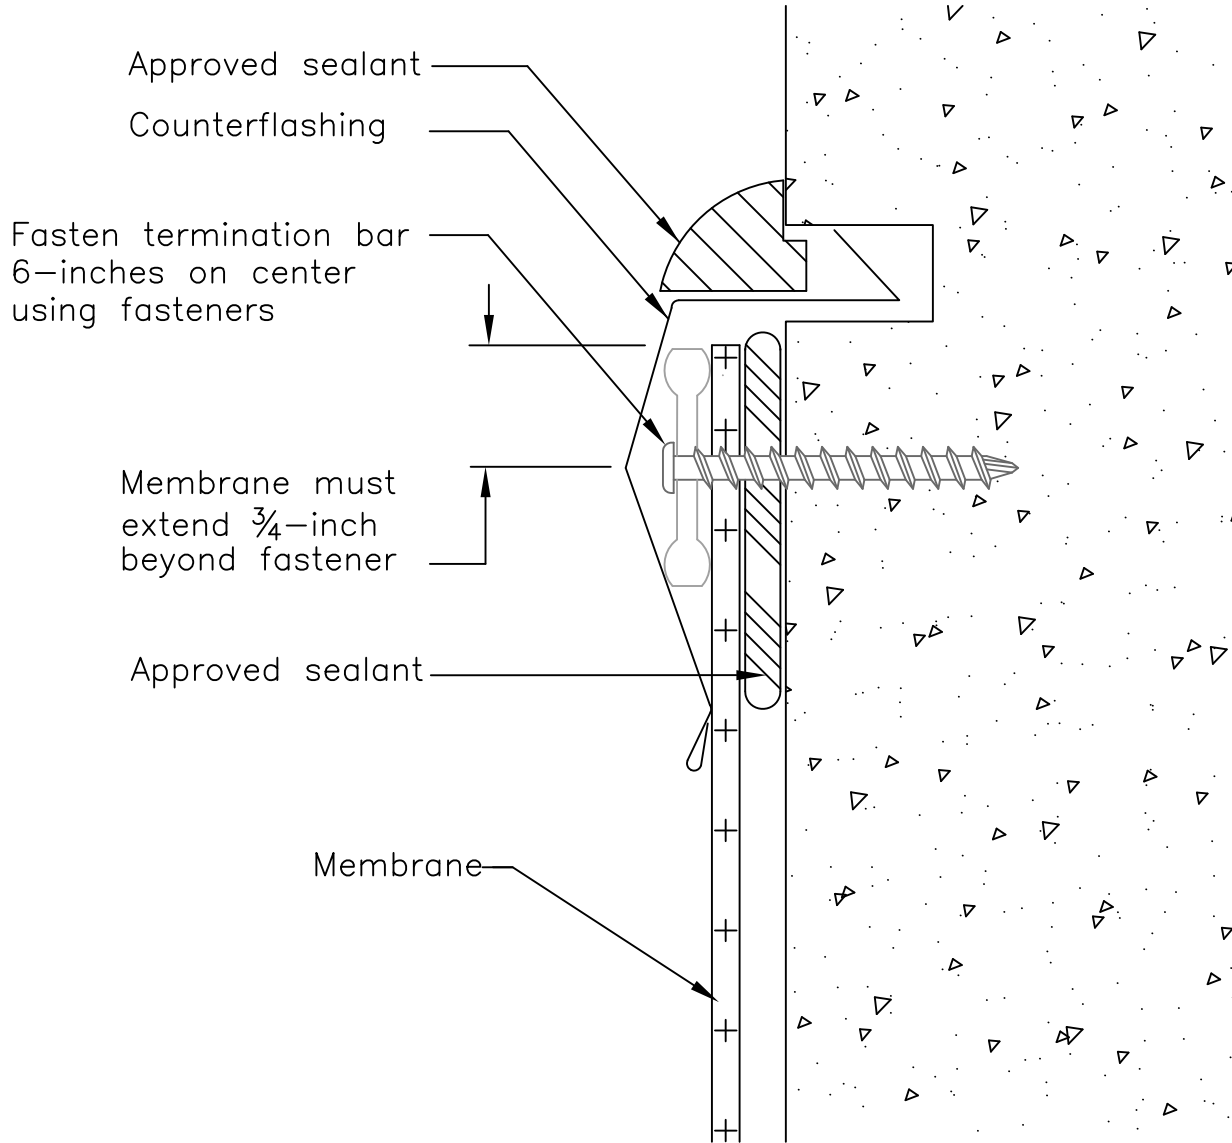

Note 1: This detail is only applicable to concrete or block walls.

Note 2: Minimum termination height for parapet wall flashing is 8-inches above the finished deck.

DATE: JANUARY 2013

PARAPET WALL DETAIL

DRAWN BY: ENG. DEPT.

REGLET COUNTERFLASHING

SCALE: NONE

NEW CONSTRUCTION OR RE-ROOF