

Description:

The Arched Coping offers a complete finish to any parapet wall. The system utilizes pre-notched lap joints, allowing for fast and secure installation and yielding positive water drainage.

- Fabricated in 5' lengths to fit each arch radius specification; Widths are customized to specification.
- Three piece construction using Pittsburgh seam.
- Fabricated to wall widths 6" to 40".
- 3" minimum face and back leg size.
- Hemmed drip kick to receive splice cleats.
- Splice cleats spaced 24" on center.




Energy Efficiency:

LEED® and ENERGY STAR® compliant; Recyclable.

Installation:

1. A wood nailer attached to the top of the parapet wall is required.
2. This nailer should be attached to the wall in accordance with ANSI/SPRI ES-1 3.9.
3. Install in accordance with EXCEPTIONAL® Metals Detail #6056 and Installation #6056.
4. Any deviation from the requirements set forth in detail drawings must be pre-approved, in writing, by the EXCEPTIONAL Metals Technical Department.

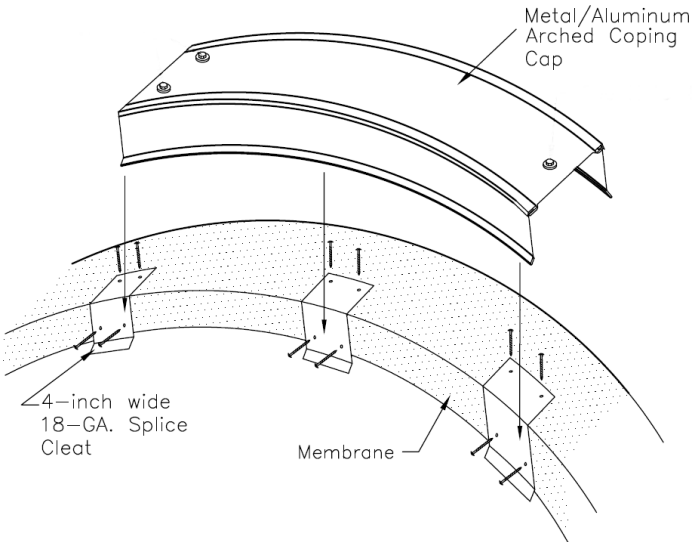

Warranty:

EXCEPTIONAL Metals offers a finish and substrate warranty. Contact the membrane manufacturer for any additional warranty that may be offered.

Material	Gauge	Finish
Aluminum	.032	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume®	24-gauge	Mill or Kynar®

Technical Services:

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call EXCEPTIONAL Metals.